

a) passing a precursor film through at least one pair of interdigitating grooved rollers, said rollers having a depth sufficient to impart a WVTR of at least 100 g/m²/day and

b) wherein said precursor film includes a polyolefin about 100 parts, a filler present in the range of from] The process of claim 1, wherein said composition comprises from 35 to 200 parts of filler per hundred parts of said polyolefin.

Claim 6. (once amended) The [method] process of claim 5, wherein said polyolefin is selected from the group consisting of [m-LLDPE, PP, copolymer PP] metallocene catalysed linear low density polyethylene, Ziegler-Natta catalyzed polyethylene, homopolymers and copolymers of polypropylene, and combinations thereof, wherein said filler is CaCO₃; and

wherein said filler is present in said [film] composition in an amount of from 50 to 150 [pphp] parts per hundred parts polyolefin [; and
wherein said film has a WVTR above 100 g/m²/day].


REMARKS

Applicants respectfully submit that the above clarifications to the claims now make them clear and respectfully request that the prosecution and examination be immediately continued.

All of the rejections and objections have been addressed.

The claims are now in condition for allowance.

Respectfully submitted,

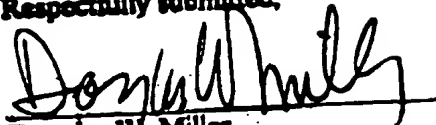


Douglas W. Miller
Agent for Applicants
Registration No. 36,608

Exxon Chemical Company
Law Technology
P. O. Box 2149
Baytown, Texas 77522-2149
(713) 425-1993

CERTIFICATE OF FACSIMILE TRANSMISSION UNDER 37 CFR § 1.8(a)

I hereby certify that this paper is being facsimile transmitted to the United States
Patent and Trademark Office on March 23, 1998.

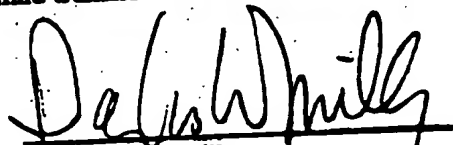

Douglas W. Miller
Registration No. 36,608